


# Samson

Recessed spotlight adjustable with trim  
Ref. | 1021

Samson | 1021



## Description

### Housing

**Material** | Aluminium  
**Mounting** | Ceiling Recessed  
**Adjustability** | Tilt 0° to 50° and rotation 350°  
**Protection indice** | IP20  
**Safety line** | L 1000mm  
**Finishing** | White powder RAL 9003 / Black powder RAL 9005 / Other available on request

### Light source

**Light source** | LED  
**Initial chromaticity** | 2 SDCM / 3 SDCM  
**Colour rendering index** | CRI>80 / CRI>90 / CRI>95 / CRI>97  
**Colour temperature** | 2700K / 3000K / 3500K / 4000K  
**Lumen maintenance** | Ta 25°C L90/B10 50000h

### Driver

**External - Connected** | No dimmable On-Off / Dimmable (Dali, 1-10V)  
**Protection indice** | IP20  
**Input voltage** | 220 to 240V  
**Input frequency** | 50Hz/60Hz  
**Power factor** | 0,9  
**Driver lifespan** | 5000 h: 1%  
**Range of operating temperatures** | +10°C to +40°C  
**Average ambient temperature** | +25°C  
**Power** | 20W 500mA / 28W 700mA

### Optic

**Optical type** | Lens (15°, 24°, 36°)  
**Light distribution** | Symmetric

### Luminous flux

**Luminous flux tolerance** | +/- 10%



<b>20W 500mA</b>	3000K, CRI>97, 1637lm
	4000K, CRI>97, 1719lm
<b>28W 700mA</b>	3000K, CRI>97, 2143lm
	4000K, CRI>97, 2281lm

### Accessories and options on request

Fast connector

### Conformity

European technical standard EN60598-1 and annexes.

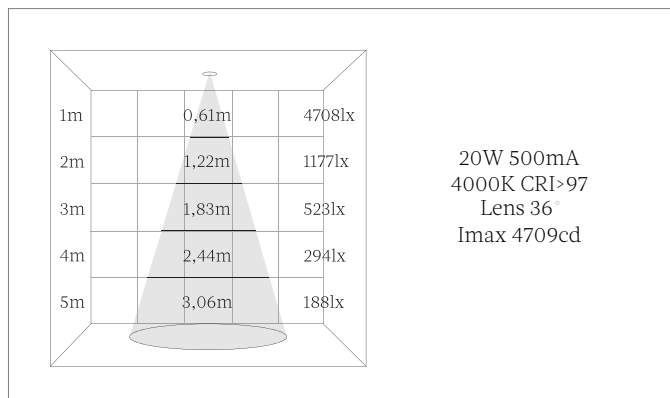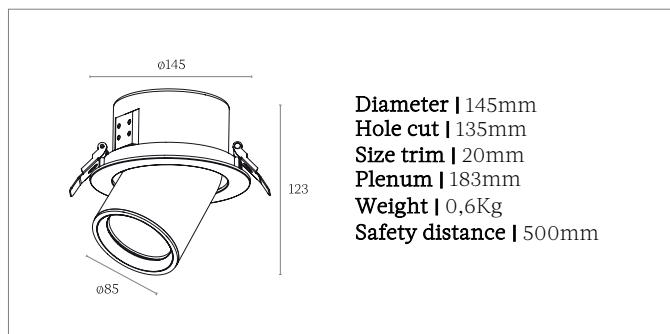

### Contact

20, rue de Tournon 75006 Paris, France  
 Phone: +33(0)1 43 54 00 55  
 Email: [bonjour@marlone.co](mailto:bonjour@marlone.co)  
[www.marlone.co](http://www.marlone.co)



### Downloads and product information

Product page: <https://marlone.co/produits/samson-1021/>